

KVO






- Caudal de 0 a 3.000 m³/h
- Extra plano
- Se puede instalar en todas las posiciones
- Panel superior desmontable e insonorizado
- Montaje exterior
- Motor regulable

CARACTERÍSTICAS TÉCNICAS


KVO	100	125	160L	200	250L	355	400
Voltaje V	230	230	230	230	230	230	230
Potencia máx. W	78	89	135	165	303	1.163	1.240
Intensidad máx. A	0,35	0,39	0,59	0,77	1,33	5,11	5,47
Caudal máx. m ³ /h	280	365	498	913	1.502	2.901	3.009
Temp. máx. °C	60	65	70	45	50	65	60
Peso Kg	5,9	5,7	7,2	11,4	17,7	40	40
Índice de prot. motor IP	44	44	44	44	44	54	54
T/min	2.445	2.180	2.545	2.580	2.470	1.370	1.355
Regulador de velocidad	REE 1	REE 1	REE 1	REE 1	REE 2	RTRE 7	RTRE 7
LpA en radio de 3m dB(A)	39	52	43	49	52	55	56

CURVAS DE SELECCIÓN

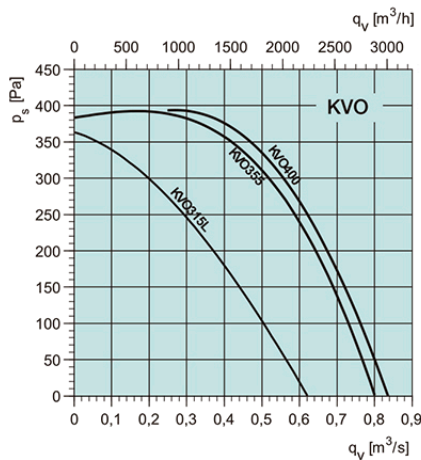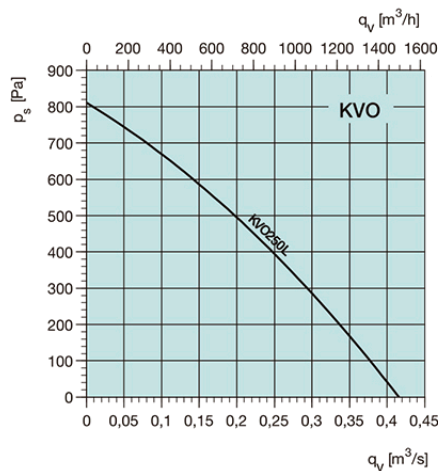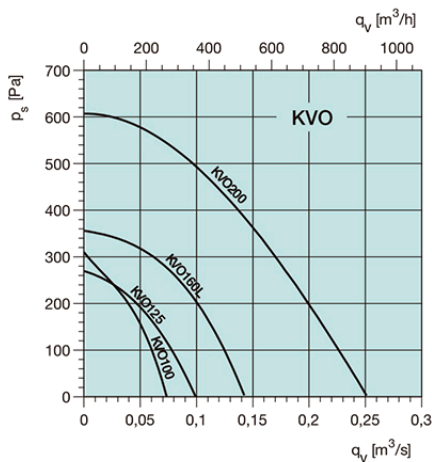

DIMENSIONES

KVO	A	B	C	D	E	F	G	H
100	100	329	367	69	76	300	150	150
125	125	329	367	84	72	300	150	150
160	160	329	367	99	90	300	185	185
200	200	419	466	123	109	435	220	220
250	250	527,5	568	151	133	558	270	270
315	315	614	700	183	164	615	344	260
355	355	572	661	209	231	640	425	600
400	400	572	653	221	209	640	425	600

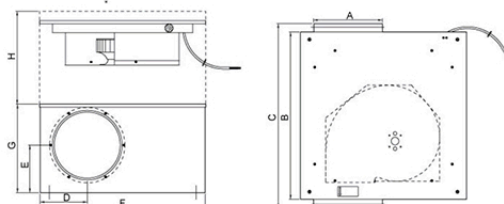

TARIFAS

Productos	Item
Ventiladores	
KVO 100	2075
KVO 125	2020
KVO 160	2024
KVO 200	2025
KVO 250	2027
KVO 315	2029
KVO 355	2030
KVO 400	2031
Bridas de conexión rápida	
FK100	1607
FK125	1608
FK160	1610
FK200	1611
FK250	1612
FK315	1613
FK355	1614
FK400	1615
Cajas filtro G3	
FGR100.3	1802
FGR125.3	1804
FGR160.3	1809
FGR200.3	1812
FGR250.3	1815
FGR315.3	1818
FGR355.3	1821
FGR400.3	1823
Compuertas anti-retorno	
RSK 100	5597
RSK 125	5598
RSK 160	5601
RSK 200	5602
RSK 250	5603
RSK 315	5604
Silenciadores	
LDC100.600	5188
LDC125.600	5190
LDC125.900	5191
LDC160.600	5192
LDC160.900	5193
LDC200.600	5194
LDC200.900	5195
LDC250.900	5196
LDC315.900	5197
LDC400.900	5198
Reguladores de velocidad	
REE 1	5314
REE 2	5316
REE4	5317
RTRE 1.5	5008
RTRE 3	5009
RTRE 5	5010
RTRE 7	5011